HS-150ST Premium Accelerometer


AC acceleration and temperature output via 4 Core PUR Cable with Removable Stainless Steel Conduit

Key Features

- Temperature output
- · Waterproof to IP68
- · Side entry for easy access
- · Removable Stainless Steel Conduit

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

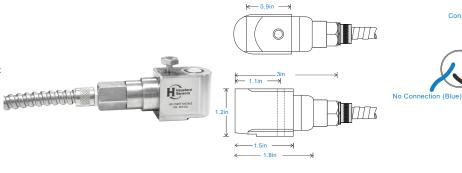

Technical Performance

Mounted Base Resonance see 'How To Order' table (nominal) Sensitivity see: 'How To Order' table ±10% Nominal 80Hz at 72°F Frequency Response 120cpm (2Hz) to 600kcpm (10kHz) ± 5% 90cpm (1.5Hz) to 720kcpm (12kHz) ± 10% 48cpm (0.8Hz) to 900kcpm (15kHz) ± 3dB Isolation Base isolated see: 'How To Order' table Range Temperature Output 10 mV/°C standard 212°F - Option 266°F Less than 5% Transverse Sensitivity

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	5.9ft. lbs
Mounting Bolt provided	see: 'How To Order' table x 1.4in long
Weight	7.2 oz. (nominal) body only
Maximum Cable Length	3,280 ft.
Standard Cable Length	16 ft.
Screened Cable	PUR - length to be specified with order
Mounting Threads	see: 'How To Order' table


Electrical

Excitation Voltage: 18-30Volts DC **Electrical Noise** 0.1mg max Current Range 0.5mA to 8mA Bias Voltage 10 - 12 Volts DC Settling Time 2 seconds Output Impedance 200 Ohms max. >108 Ohms at 500 Volts Case Isolation

Environmental

Operating Temperature Range	-22 to 194°F
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013

Typical Frequency Response (at 100mV/g)

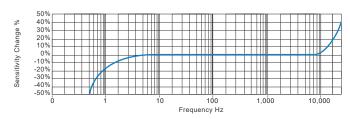

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



Connection Details


Screen to case

0V (Black)

ve Power (White)

ve Temp. (Red)

How To Order

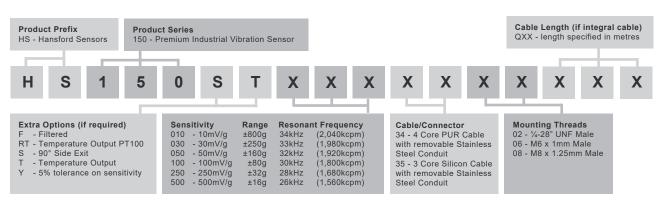



www.hansfordsensors.com sales@hansfordsensors.com

