



**INTELLECTUAL PROPERTY STATEMENT**  
 This drawing contains information that is the property of Diversified Technical Systems, Inc. (DTS). All copyright, patent, and ownership rights are retained. This information shall not be disclosed, reproduced in whole or in part, or used for manufacture without prior written consent from DTS.

REV	ZONE	DESCRIPTION	DATE	BY
0		ORIGINAL RELEASE	2017-08-15	JC

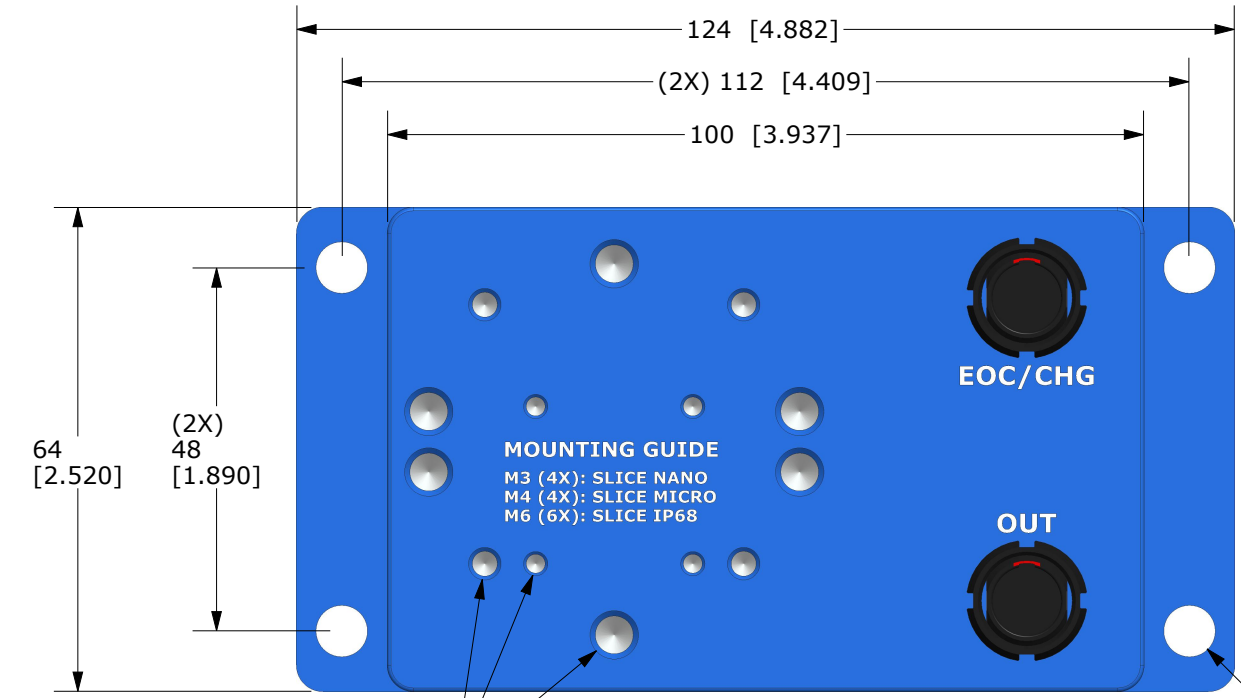

TOP THREADED HOLE PATTERNS FOR MOUNTING OF SLICE IP68, MICRO, OR NANO COMPONENTS.

(4X)  $\varnothing 6,8$  [.268] MOUNTING THRU HOLES FOR M6 OR 1/4" FASTENERS. TORQUE SPEC [DRY]: 8.5 Nm (75 in-lb)

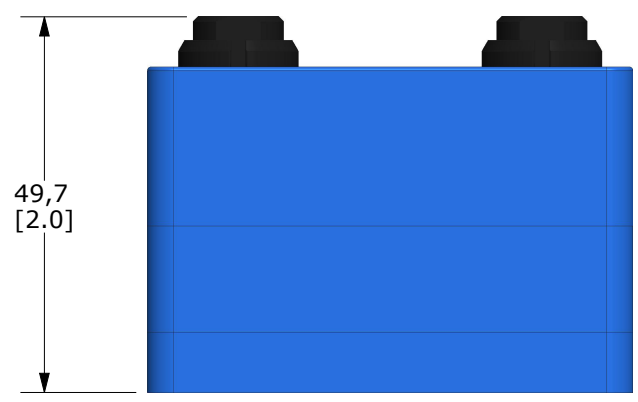

**WEIGHT: 600 g ( $\pm 10\%$ )**

SEAL BEACH, CA 90740 562-493-0158 www.dtsweb.com	DESCRIPTION:		SLICE IP68, POWER PACK, 2200 mAh	
	MATERIAL:	6061-T6 ALUMINUM W/ BLUE ANODIZE		REV:
UNLESS OTHERWISE SPECIFIED:		DRAWN:	J CASEY	
UNITS = MM [INCH]	DATE:	SIZE:	SCALE:	SHEET:
DIMENSIONAL TOLERANCES $\pm .254$ [0.010"]	2017-08-15	B	1:1	1 OF 1
INTERPRET PER ASME Y14.5. DO NOT SCALE.				