


**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED


**REVISIONS**

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	14040	INITIAL RELEASE. SAME AS REV X2.	KG 04/19/18	LN	AS

MODEL	SENSITIVITY
4775A1	0.1 mV/pC
4775A2	1.0 mV/pC
4775A3	5.0 mV/pC
4775A4	10 mV/pC

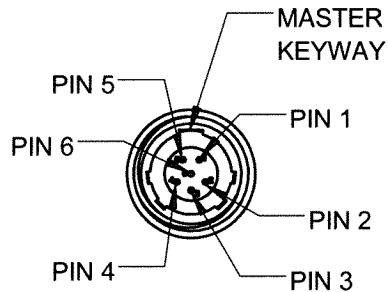


- PIN 1 - (+) INPUT
- PIN 2 - (-) INPUT
- PIN 3 - CASE GND
- PIN 4 - N/C
- PIN 5 - N/C
- PIN 6 - N/C

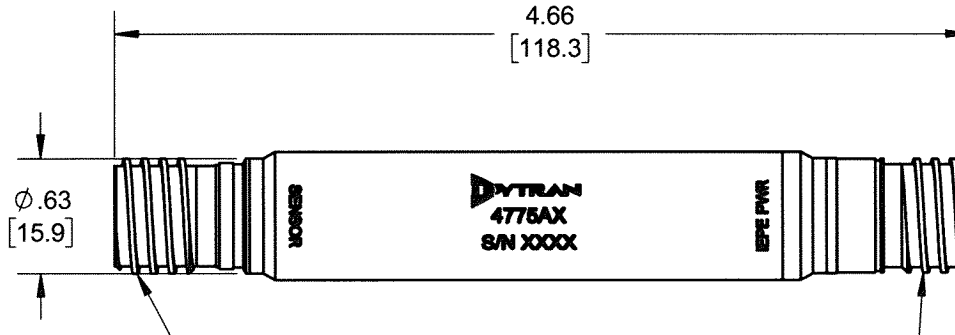

CONNECTOR, 6-PIN,  
D38999/25YA35PN  
MATES WITH  
D38999/26WA35SN

CONNECTOR,  
3-PIN, D38999/25YA98PA  
MATES WITH  
D38999/26KA98SA

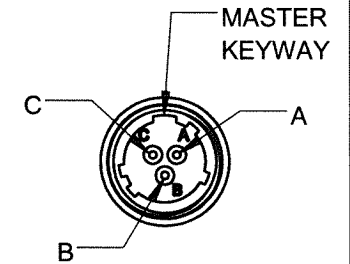

- PIN A - CASE GND
- PIN B - GND/RET
- PIN C - SIG/PWR

2. MATERIAL: 300 SERIES STAINLESS STEEL

1. WEIGHT: 108 GRAMS, MAX.

USED ON	NEXT ASSY	UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.
APPLICATION		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS TOLERANCES ARE: INCHES METRIC ANGLES .XX ± .03 X ± 0.8 ± 1° .XXX ± .010 .XX ± 0.25
THIRD ANGLE PROJECTION USA		MATERIAL
		FINISH
ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.		DO NOT SCALE DRAWING

CONTRACT NO.		
APPROVALS		DATE
ORIG	KG	02/28/18
CHK	LN	4/26/18
APP	AS	5/1/18
APP		

TITLE: **OUTLINE/INSTALLATION DWG,  
DIFFERENTIAL CHARGE AMPLIFIER,  
4775A SERIES**

SIZE	CAGE CODE	DWG. NO.	REV
<b>A</b>	<b>2W033</b>	<b>127-4775A1</b>	<b>A</b>

SCALE: 1:1      SOLIDWORKS      SHEET 1 OF 1

<b>Model Number</b> 4775A4	<b>PERFORMANCE SPECIFICATION</b>	<b>DOC NO</b> PS4775A4
	<b>CHARGE AMPLIFIER, IN-LINE</b>	REV B, ECN 14249, 05/29/18



- FOR ULTRA HIGH TEMP SENSORS
- DIFFERENTIAL INPUT
- LOW POWER
- TOLERATES LOW CURRENT & LOW INSULATION RESISTANCE FROM SENSORS

		ENGLISH		SI	
<b>PHYSICAL</b>					
Weight, Max		3.8	oz	108	grams
Input Connector [1]	Type	6-pin		6-pin	
Output Connector [2]	Type	3-pin		3-pin	
Housing	Material	300 Series		300 Series	
	Isolation	Case Grounded		Case Grounded	
<b>PERFORMANCE</b>					
Sensitivity, ±3% [3]		10	mV/pC	10	mV/pC
Input Range		500	pC	500	pC
Frequency Range, ±5%	2mA	5 to 10,000	Hz	5 to 10,000	Hz
Output Voltage Range		±5	Vp	±5	Vp
Non-Linearity [4]		±1%	%F.S.	±1%	%F.S.
Noise floor		100	µVrms	100	µVrms
Maximum Input Voltage		30	Vp	30	Vp
Minimum Source Resistance		50	kΩ	50	kΩ
Maximum Source Capacitance		20,000	pF	20,000	pF
Turn on Time (within 10% of bias)		<30	sec	<30	sec
Thermal Coefficient of Sensitivity, Max		0.01	%/°F	0.02	%/°C
<b>ELECTRICAL</b>					
Supply Current Range [5]		2 to 20	mA	2 to 20	mA
Compliance Voltage Range		+18 to +30	VDC	+18 to +30	VDC
Output Impedance, Typ.		<100	Ω	<100	Ω
Output Bias Voltage		10 to 13	VDC	10 to 13	VDC
Discharge Time Constant		>0.1	sec	>0.1	sec
<b>ENVIRONMENTAL</b>					
Shock Max		1,000	g pk	9,810	m/s <sup>2</sup>
Vibration Max		300	g pk	2,943	m/s <sup>2</sup>
Operating Temperature		-40 to +185	°F	-40 to +85	°C
Seal		Hermetic		Hermetic	

**This family also includes:**

Model	Sensitivity (mV/pC)	Range (pC)	Resolution (µVrms)	Oper. Temp(°F)	TC (sec)
4775A1	0.1	50,000	100	-40 to +185	>0.1
4775A2	1.0	5,000	100	-40 to +185	>0.1
4775A3	5.0	1,000	100	-40 to +185	>0.1




Refer to the performance specifications of the products in this family for detailed description

**Supplied Accessories:**

- 1) Accredited calibration certificate (ISO 17025)

**Notes:**

- [1] D38999/25YA35PN connector plug, mates with D38999/26WA35SN
- [2] D38999/25KA98PA connector receptacle, mates with D38999/26KA98SA
- [3] Measured at 100 Hz, 1000 pC differential input per ISA RP 37.2.
- [4] Percent of full scale or any lesser range, zero based best-fit straight line method.
- [5] Do not apply power to this system without current limiting, 20 mA MAX. To do so will destroy the integral IC amplifier.
- [6] In the interest of constant product improvement, we reserve the right to change specifications without notice.

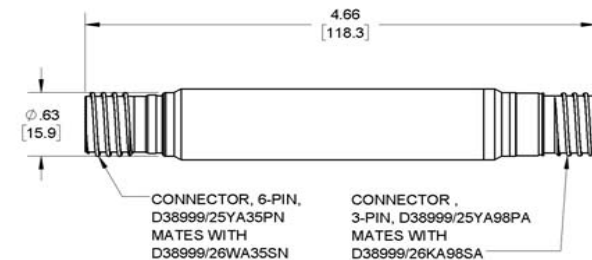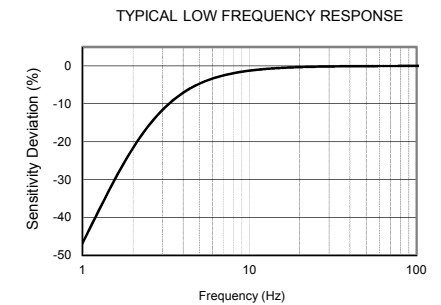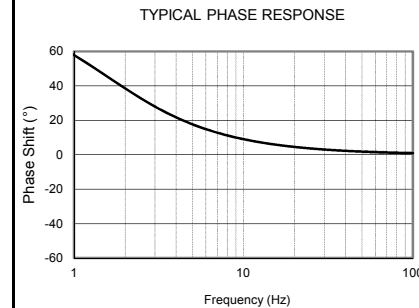

Units on the line drawing are in inches, units in brackets are in millimeters. Refer to 127-4775A1 for more information.

