

Defiant & Hyperion μ ADC

Micro Air Data System (μ ADS)

The Aeroprobe μ ADS is a complete solution for in flight measurement of air data at an unprecedented combination of range, size, and accuracy. The μ ADS consists of two primary components: a five-port Air Data Probe and Micro Air Data Computer (μ ADC). These components provide direct measurements of **Angle-of-attack, Angle-of-sideslip, airspeed, static and total pressure, and barometric altitude.**



Highlights

- ✓ User Configurable Operational Modes
- ✓ Command Line Interface
- ✓ Field Upgradeable Firmware
- ✓ Battery-backed Real Time Clock/Calendar
- ✓ Start-up Sync Signal (TTL Trigger)
- ✓ Rugged Aluminum Enclosure
- ✓ LED Indicator Lights
- ✓ Data Logging (Standard 8GB)
- ✓ External GPS Synchronization
- ✓ PT100 RTD Temperature Input
- ✓ Mounting Hardware
- ✓ Probe Heater Control
- ✓ Optional embedded AHRS

Qualifications

The Defiant and Hyperion Micro Air Data Computer have been tested and certified compliant with the following military and commercial standards.

Table 1. Military and Commercial Standards		
Test Standard	Method/Procedure/Section	Title
DO-160G	Sections 4.5.1 & 4.5.2, 8 hours @ -55°C (4 hours non-op./4 hours op.)	Storage & Operational Low Temperature
DO-160G	Sections 4.5.3 & 4.5.4 (Proc. I & III), 85°C	Storage & Short-Term Operational High Temperature
DO-160G	Section 4.5.3 (Proc. II), 3 24-hour cycles	Operational High Temperature
Custom	1000 ft @ 25°C to 65000 ft @ -55°C, 3 9-hour cycles	Cyclic Temperature & Altitude
MIL-STD-810H	Method 514.8, Cat. 24, GMI, 1 hour/axis	Vibration
MIL-STD-810H	Method 516.8, Proc. I, 50G, 6 ms, TPS, 3/dir./axis	Shock

System Specifications

Table 2. μ ADC Interface and SWAP			
Parameter	Defiant	Hyperion	Unit
ELECTRICAL			
Input Voltage Range	8 to 36		VDC
Power at 12 VDC	1.1		W
Power at 28 VDC	1.5		W
Probe Heater Max Operating Current ¹	3		Amps
Probe Heater Max Operating Voltage ¹	60		VDC
RTD (Class A or B) Range	-200 to 600		°C
COMMUNICATION			
Sampling Data Rate Options ²	10, 20, 50, 100		Hz
Serial Specification Options	RS232, RS422		-
Serial Data Output Streaming Rate Options ²	460800, 230400, 115200, 57600, 38400, 19200		bps
Analog to Digital Resolution, bits	16		bits
MECHANICAL			
Size	(66 x 79 x 41) 2.6 x 3.1 x 1.6		mm (inches)
Mounting Flange Footprint	66 x 97 x 1.5 (2.6 x 3.8 x 0.06)		mm (inches)
Weight	181	192	grams

¹ μ ADC specification only. Check Air Data Probe Technical drawings for operating voltage and power.

²Serial streaming data rate and sample rate are interrelated. All combinations are not available. Refer to the Aeroprobe Micro Air Data Interface Document (Document No. 91034-14-ICD-01).

Table 3. Sensor Range Options (Properties at Sea Level, 15 °C)

Pressure Range ¹	1 inH ₂ O	2 inH ₂ O	5 inH ₂ O	10 inH ₂ O	1 psi	100 mbar	160 mbar	5 psi	15 psi
Maximum Indicated Airspeed²	39 knots Mach 0.06	55 knots Mach 0.08	87 knots Mach 0.13	120 knots Mach 0.19	200 knots Mach 0.31	240 knots Mach 0.37	310 knots Mach 0.46	440 knots, Mach 0.66	630 knots, Mach 0.95
Recommended Minimum Airspeed²	9.0 knots	13 knots	17 knots	20 knots	33 knots	40 knots	51 knots	75 knots	130 knots
Minimum Reported Airspeed³	5.0 knots	6.8 knots	12 knots	16 knots	25 knots	31 knots	39 knots	58 knots	97 knots
Maximum Safe Over-Pressure⁴	270 inH ₂ O (9.7 psi)	270 inH ₂ O (9.7 psi)	300 inH ₂ O (10.8 psi)	350 inH ₂ O (12.6 psi)	10 psi	1400 mbar (20.3 psi)	1400 mbar (20.3 psi)	30 psi	30 psi

¹Specified pressure range. Pressure inputs greater than this range may cause accuracy degradation. See Maximum Safe Over-Pressure.

²Indicated airspeed below which expected error in AoA could be greater than 4°. See Figures 1 & 2 for more detail.

³The minimum reported airspeed is dictated by the minimum dynamic pressure that can accurately be measured for the given sensor range at zero altitude.

⁴Pressures above the specified maximum safe over-pressure will cause damage to the internal pressure sensors.

Table 4. μADC Specifications

Parameter	Defiant	Hyperion	Unit
Angle of Attack Range	±20	±20	deg
Angle of Sideslip Resolution ¹	0.01	0.01	deg
Angle of Sideslip Range	±20	±20	deg
Angle of Sideslip Resolution ¹	0.01	0.01	deg
Barometric Altitude Range	-500 to 65,000	-500 to 75,000	ft
Barometric Altitude Resolution ¹	3.3	3.3	ft
Operating Temperature Range ^{1,2}	-40 to 85	-40 to 85	°C
Storage Temperature Range	-55 to 85	-55 to 85	°C

¹Sea level pressure.

²μADC specification only. Check Air Data Probe Technical drawings for operating temperatures.

Table 5. Attitude Heading Reference System (AHRS) Specifications

Parameter	Typical	Unit
Roll/Pitch	0.75 (static), 1.0 (dynamic)	deg
Heading	2.0	deg
Output Rate	100	Hz
Gyro Range	±2000	°/s
Gyro Non-linearity	0.1	%FS
Gyro Noise Density	0.01	°/s/√Hz
Gyro G-sensitivity	0.001	°/s/g
Gyro In-run Bias Stability	10	°/hr
Accelerometer Range	±16	g
Accelerometer Non-linearity	0.5	%FS
Accelerometer Noise Density	200	μg/√Hz
Accelerometer Zero g-output	±2	mg
Accelerometer In-run Bias Stability	0.1	mg
Bandwidth	180	Hz
Magnetometer Range	±0.8	Gauss
Magnetometer Non-linearity	0.1	%FS
Magnetometer Noise Density	200	μG/√Hz
Magnetometer Non-linearity	0.2	%FS
Magnetometer Total RMS noise	0.5	mG

Expected Total System Errors - Includes ADP & μ ADC

Figure 1. Angle Error (2σ)

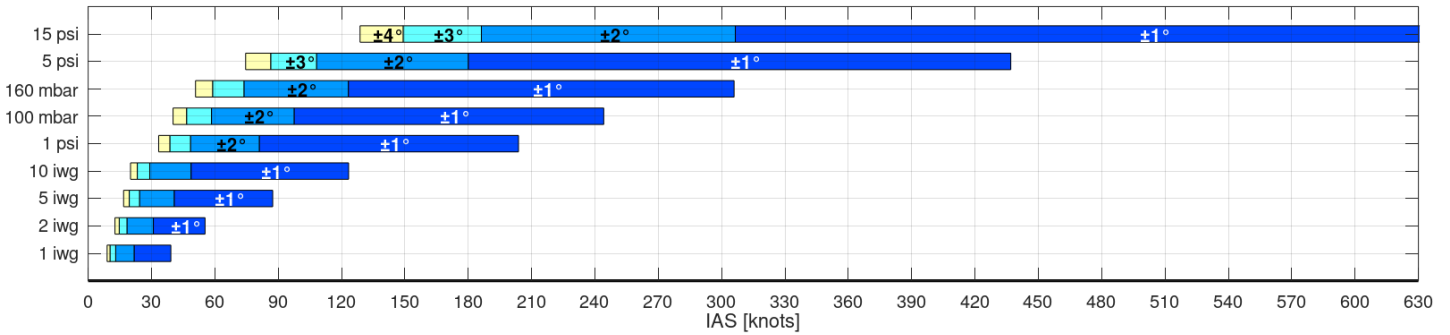


Figure 2. Indicated Airspeed Error (2σ) [knots]






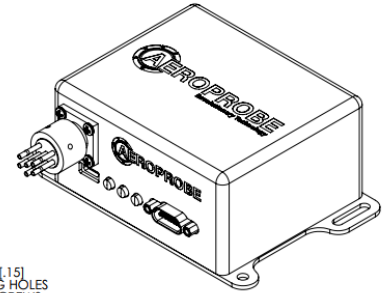
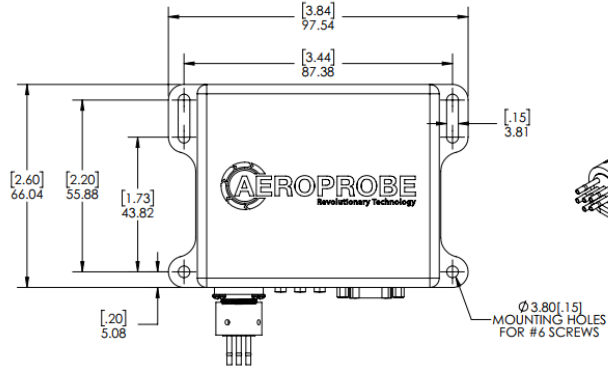


Figure 3. Barometric Altitude Error (2σ)




Mechanical Properties

- NOTES:
-  6 PORT PNEUMATIC QUICK DISCONNECT
 -  MICRO USB CONNECTOR
 -  D SUB CONNECTOR, MICRO D, RECEPTACLE, MIL-DTL-83513 SERIES, 15 CONTACTS

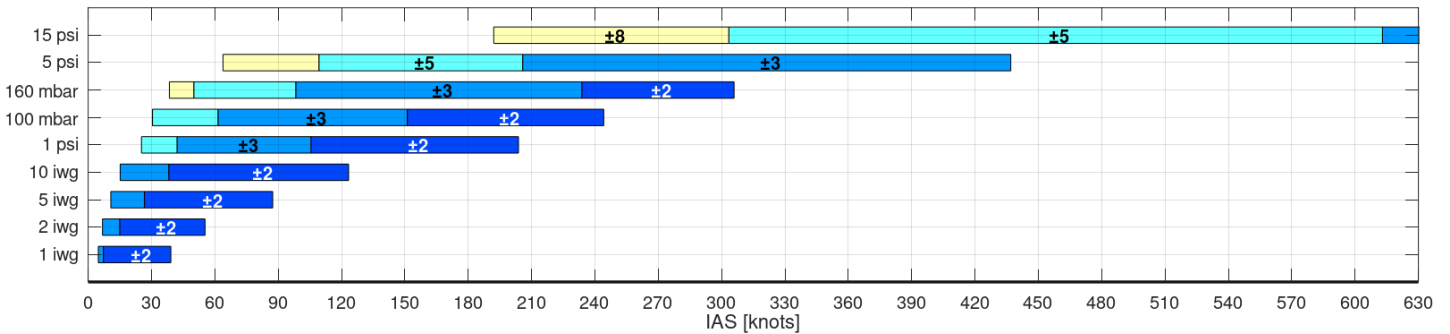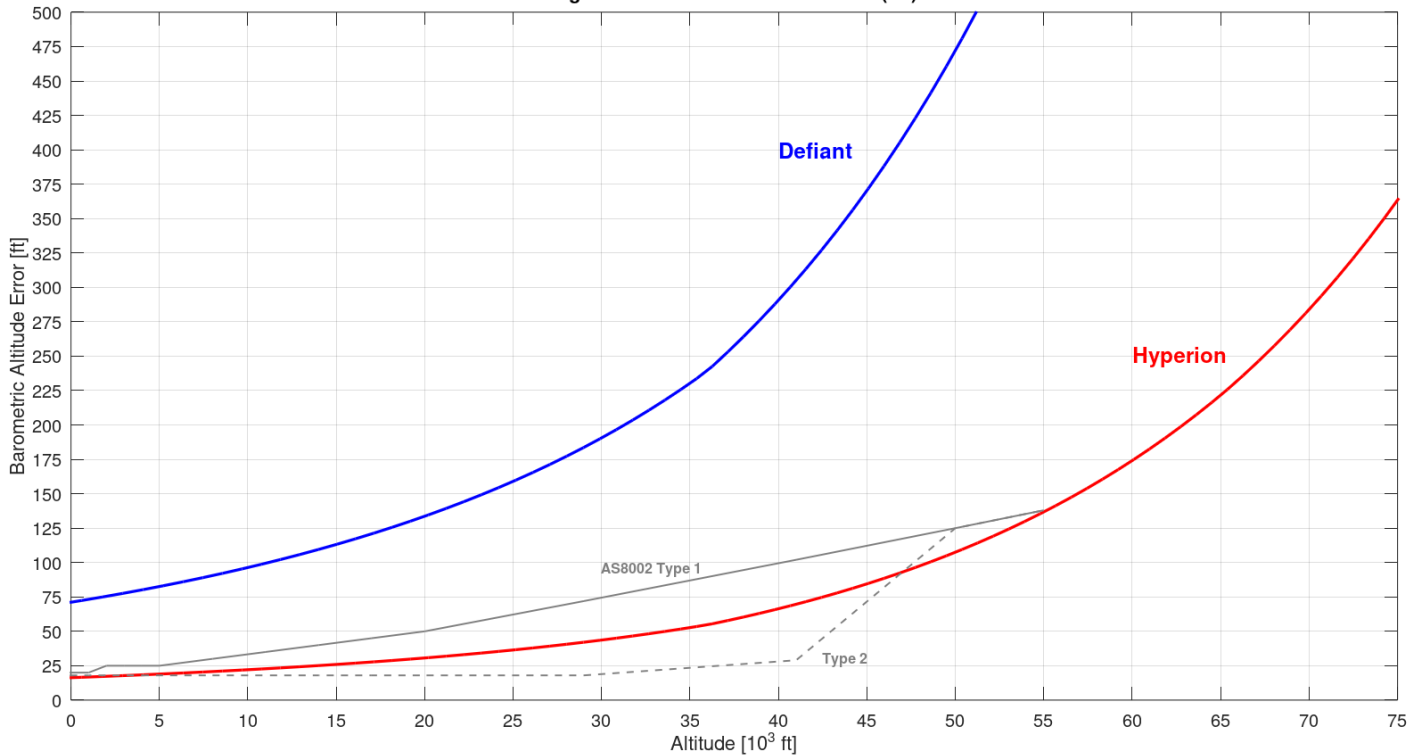

Defiant &
Hyperion



DETAIL A
PROBE PNEUMATIC CONNECTOR
PORT LOCATIONS
SCALE 4 : 1

