HS-150S Premium Accelerometer

AC acceleration output via 4 Core Polyolefin HFFR


Key Features

- · Side entry for easy access
- High Temperature
- · Premium design

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical



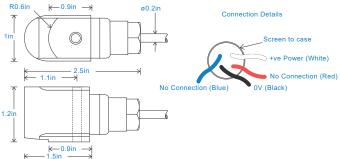

Technical Performance

 Mounted Base Resonance
 see 'How To Order' table (nominal)

 Sensitivity
 see: 'How To Order' table ±10%

 Nominal 80Hz at 72°F

 Frequency Response
 90cpm (1.5Hz) to 600kcpm (10kHz) ± 5%

 30cpm (0.5Hz) to 720kcpm (12kHz) ± 10%

 12cpm (0.2Hz) to 900kcpm (15kHz) ± 3dB

 Isolation
 Base isolated

 Range
 see: 'How To Order' table

 Transverse Sensitivity
 Less than 5%

Mechanical

Case Material Stainless Steel Sensing Element/Construction PZT/Shear Mounting Torque 5.9ft. lbs Mounting Bolt provided see: 'How To Order' table x 1.4in long Weight 7.2 oz. (nominal) body only 3,280 ft. Maximum Cable Length Standard Cable Length Screened Cable Polyolefin HFFR - length to be specified with order Mounting Threads see: 'How To Order' table

Electrical

 Excitation Voltage:
 18-30 Volts DC

 Electrical Noise
 0.1mg max

 Current Range
 0.5mA to 8mA

 Bias Voltage
 10 - 12 Volts DC

 Settling Time
 2 seconds

 Output Impedance
 200 Ohms max

 Case Isolation
 >108 Ohms at 500 Volts

Environmental


 Operating Temperature Range
 -67 to 266°F

 Sealing
 IP68

 Maximum Shock
 5000g

 EMC
 EN61326-1:2013

Typical Frequency Response (at 100mV/g)

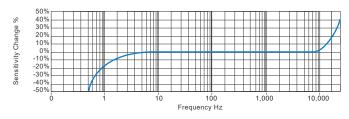


Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

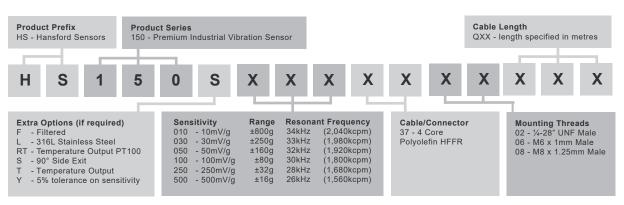



www.hansfordsensors.com sales@hansfordsensors.com

